



TECHNICAL DATA / FEATURES

- dimensions: 271x44x34
- luminous flux of the LED module: 1400 lm
- luminous flux of the lamp: 1100 lm
- maximum power: 19W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 30° x 7°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: -
- protection:
 - other:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Especially recommended for fire trucks.

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.



The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

They can be mounted horizontally, on any flat element of a vehicle body.

It is possible to install needed connectors on wire (on request).

DIMENSIONS

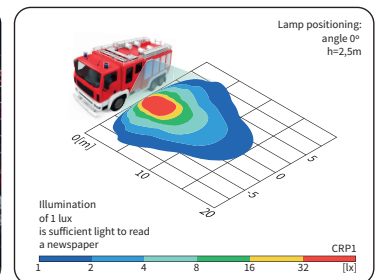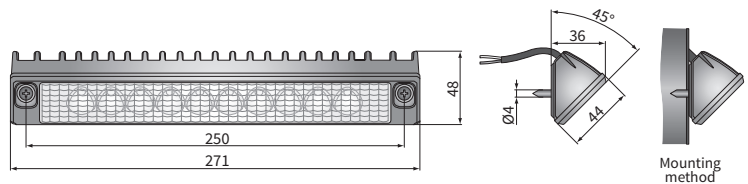

Cat. number	Hella Catal. No.	Luminous flux			IP rating	Accessories	LED module 12V-24V	cable 0.5 m	cable 8 m	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5
		800 lm	1400 lm	IP rating									
CRP1.54600	1GD 996 098-001	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓